



The G8R Series Padlock

Built to Thrive in Harsh Climates

With its tough, water resistant construction, the *G8R Series* is the padlock to choose for extreme environments like trailers, cargo containers, and gates.

The padlock body is constructed of solid stainless steel. You can choose either a stainless steel shackle for maximum corrosion resistance, or hardened steel to withstand severe physical attack. Each padlock includes a weather-seal cap attached by a steel cable. An optional finish plate is also included for applications that do not require a water resistant seal.



Benefits:

- ◆ Sealed construction protects cylinders from water and road grime
- ◆ Stainless steel body resists attack and corrosion
- ◆ Shackles can be specified in hardened or stainless steel to fit your application

Applications:

The G8R Series padlock was designed for locking installations requiring weather resistance and strong physical security. Applications include cargo containers, trailer doors, gates, and vending machines.

Warranty:

Warranted for two years against manufacturer's defects.

Technical Information:

Body is 300 series Stainless Steel.

Stainless Steel shackle is 303 Stainless.

1/4 - 20 X 1/2" tapped hole in body for attaching chain or cable.

Hardened shackle is 1117 steel, case hardened to HRC 65.

Padlocks are sold less cylinder.

Compatible with NEXGEN electronic T-handle cylinders, and Medeco mechanical T-handle cylinders.

medeco[®]
HIGH SECURITY LOCKS
Customer Service: 1-888-633-3261

An ASSA ABLOY Group company

Ordering Information

52 - 1XX040

Shackle Type and Size


- 10 = 5/16" Stainless Steel
- 11 = 5/16" Hardened Steel
- 20 = 7/16" Stainless Steel
- 21 = 7/16" Hardened Steel

The G8R Series Padlock can be used with either mechanical or electronic cylinders. An optional cover plate is included for applications that do not require a weather proof cap.



Technical Drawings

PADLOCK DIMENSIONS

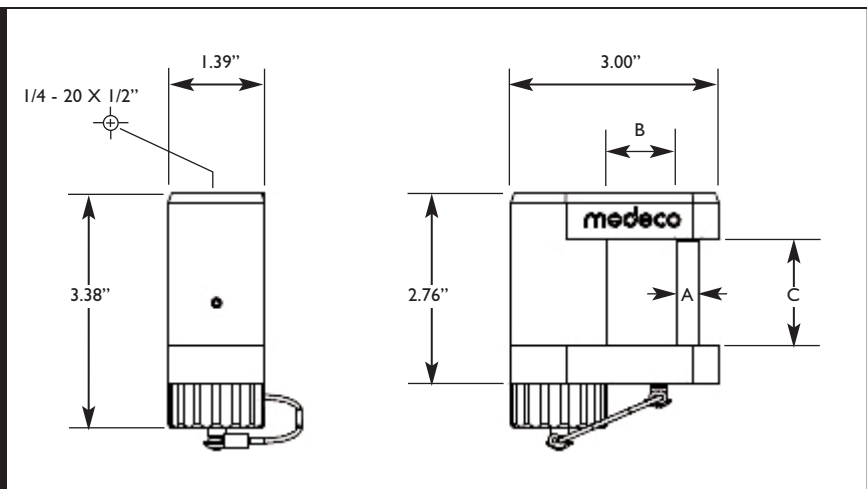

Part #	"A" Dimension	"B" Dimension	"C" Dimension
52-110040-	5/16"	.965"	1.55"
52-111040-	5/16"	.965"	1.55"
52-120040-	7/16"	.902"	1.55"
52-121040-	7/16"	.902"	1.55"

Mechanical Cylinder Packages

Includes 5 pin t-handle cylinder with steel bolt, and spacer

96-0357 = Spring Bolt Cylinder (non-key retaining)

96-0358 = Dead Bolt Cylinder (key retaining)

medeco[®]
 HIGH SECURITY LOCKS
 Customer Service: 1-888-633-3261